



FEED AND BIOFUEL


DESIGNED TO MAXIMIZE RELIABILITY AND EFFICIENCY

PALADIN PELLET MILLS

ANDRITZ

ENGINEERED SUCCESS

Designed to maximize reliability and efficiency

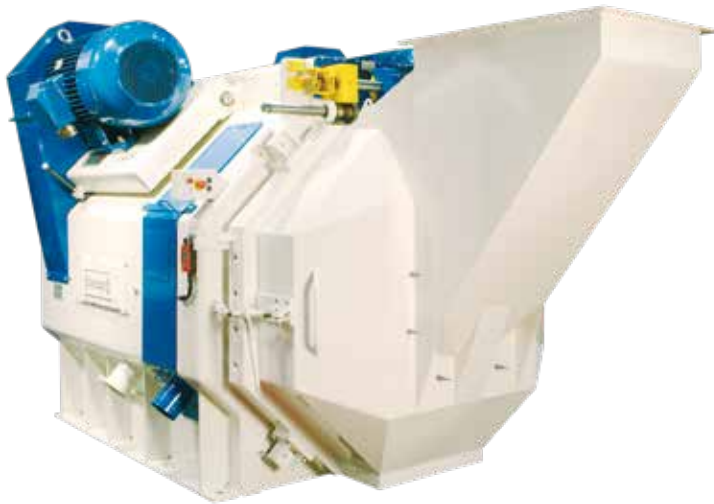

Paladin 3000



Paladin 800



Paladin 2000

Developed from a design concept proven on more than 2,500 operating machines sold throughout the world, the Paladin pellet mill series continues to advance and offer reliability, maximum efficiency, and ease of operation and maintenance.

STANDARD FEATURES ON PALADIN PELLET MILLS

- Rigid, durable construction for a variety of applications
- Two or three rolls
- Manual roll adjustment
- Taper fit die with auto-piloting effect for easy die change
- Left-hinged or right-hinged door provides access to the entire pellet chamber
- Rugged roller main shaft in two piece design, manufactured from high-quality stainless steel to withstand the harshest applications
- Hydraulic overload protection is standard for all models
- Safety systems stop the pellet mill immediately in the event of irregularities
- Two stage belt transmission

- Gravitational dump chute feeding system with incorporated pneumatic overload functionality

OPTIONAL FEATURES FOR PALADIN PELLET MILLS

- Pellet chamber in double-wall sandwich construction with heat and noise insulation
- Automatic roll adjustment is available for certain models. The system allows additional distance between die and rolls. No hydraulic or electronic components inside the die cavity
- Automatic grease lubrication systems
- Built-in hoist with lifting tools for easy and safe die change and maintenance
- Computerized process control for the monitoring of all key parameters





PALADIN SERIES

Our well-proven design concept offers reliability and maximum efficiency

Features that make the difference



1 DIE HOIST

An integrated hoist facilitates the handling of dies, rolls, front plate, and rotary feed cone.

2 ROLL ADJUSTMENT SYSTEM

The system makes roll adjustment fast, easy, and very accurate. Standard Paladin pellet mills can have two or three rolls. Automatic roller adjustment only available two roll.

With the optional automatic roll adjustment system, roll gaps can be adjusted from the control desk, which provides the advantages of fast die change, infinitely variable readjustment during operation, and resetting without the risk of rolling over the die.

3 PELLET CHAMBER

The stainless steel pellet chamber door can be left-hinged or right-hinged to suit the installation. Adjustable, calibrated knives provide the required pellet length.

4 DOOR

The door is fitted with safety switches to prevent the machine being opened while it is running.

5 V-BELT DRIVE TRANSMISSION

Shock-absorbing V-belts form the first stage of the Paladin drive transmission with a hydraulic system for constant maintenance of the correct tension. Thus, slippage is eliminated, and the operational life of the V-belts is prolonged.

6 TWO-STAGE TWIN DRIVE


The patented Paladin two-stage drive system forms the basis of ideal transmission ratios. The combination of resilient V-belts and a high-torque toothed belt reduces the noise level and makes it possible to use standard electric motors and select a variety of die speeds.

7 OVERLOAD PROTECTION

The die and roll assembly is protected by a hydraulic overload system, which stops the main motors in the event of an overload. Re-setting is quick and easy.

8 AUTOMATIC LUBRICATION

The Paladin series includes an automatic grease lubrication system to ensure that press rolls and main shaft bearings are lubricated with the correct amount of grease.

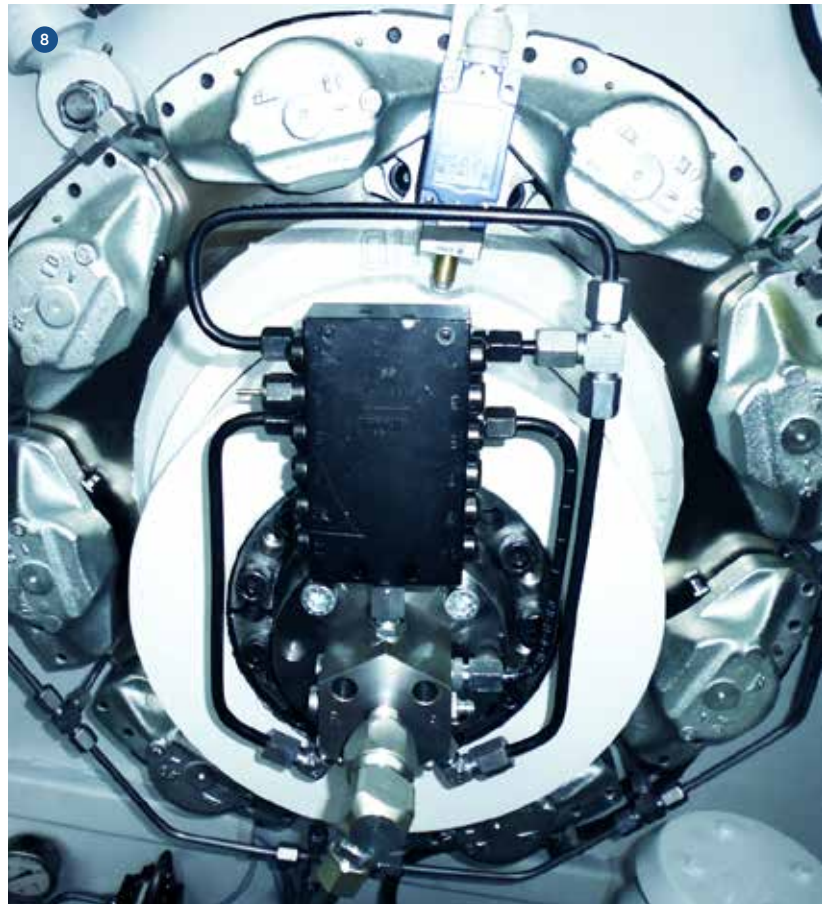

Paladin Pellet mill series



PALADIN PELLET MILL SERIES

| Pellet mill | Die press dimensions | | | | Press rolls | | | Speed 50 Hz | Max. power 50 Hz |
|------------------|----------------------|-------|-----------------|--------|-------------|-------|--|----------------|---------------------|
| | Width | Diam. | cm ² | sq.in. | Std. | Diam. | Diam. | | |
| Type | | | | | | | | m/sec. | kW |
| Paladin 800-110 | 110 | 650 | 2300 | 357 | 3 | 298 | 298 | 5.4 - 6.0 | 2x90 |
| Paladin 800-141 | 141 | 650 | 2900 | 450 | 3 | 298 | 298 | 5.4 - 6.0 | 2x90 |
| Paladin 800-175 | 175 | 650 | 3600 | 558 | 3 | 298 | 298 | 5.4 - 6.0 | 2x90 |
| Paladin 2000-200 | 200 | 880 | 5500 | 853 | 2/3* | 404 | 420 - Manual 405 - Auto 2R 370 - Auto 3R | 5.5 - 7.6 | 2x200 |
| Paladin 2000-250 | 250 | 880 | 6900 | 1070 | 2/3* | 404 | 420 - Manual 405 - Auto 2R 370 - Auto 3R | 5.5 - 7.6 | 2x200 |
| Paladin 2000-300 | 300 | 880 | 8300 | 1287 | 2/3* | 404 | 420 - Manual 405 - Auto 2R 370 - Auto 3R | 5.5 - 7.6 | 2x200 |
| Paladin 3000-300 | 300 | 1000 | 9400 | 1457 | 2 | - | 490 - Manual 420 - Auto | 6.0 - 9.0 | 2x250 |
| Paladin 3000-350 | 350 | 1000 | 11000 | 1705 | 2 | - | 490 - Manual 420 - Auto | 6.0 - 9.0 | 2x250 |
| Paladin 3000-380 | 380 | 1100 | 13100 | 2031 | 2 | - | 510 | 6.0 - 9.0 | 2x250 |

*Available with automatic roller adjustment



Keep your business growing with our global service network

Our excellent aftermarket service and support is what sets us apart from our competitors. Our cooperation with our customers does not end with the sale – or the machine installation. The good customer relationship is extended through important after-sales service and support.

OUR SERVICES

Our highly skilled and motivated employees stand ready to help you with:

- After-sales services, support, and follow-ups
- Spare and dwear parts, maintenance, and repairs
- Process optimization
- Training of plant operators

FIELD SERVICES

We offer our customers excellent field services, where our service technicians come to you and your plant for assistance. The depth and experience of our field service specialists is unmatched – backed by the full knowledge and technical support that only the equipment manufacturer can provide.

BENEFITS

There are several benefits to be gained from continuous upgrades, optimizations, and services on your equipment:

- Maximum production
- Process knowledge and experience
- Reliability and cost efficiency
- Reduced life cycle costs
- Short and effective shutdowns
- Improved energy efficiency



GLOBAL SERVICE NETWORK

Your ANDRITZ Aftermarket service and support



GLOBAL SUPPLIER – LOCAL PRESENCE

With sales, service, engineering, manufacturing and production sites located all around the world, ANDRITZ Feed and Biofuel is truly a global organization with a local presence. ANDRITZ is vital to ensuring a reliable global supply of aqua feed, animal feed, pet food, and biofuel. With full process lines accounting for half the world's production of aqua feed and biomass alone, we continuously support leading producers in achieving the highest levels in safety, quality, and control from feedstock to final product.

How can we help grow your business?

ANDRITZ Feed and Biofuel A/S

Glentevej 5-7
6705 Esbjerg, Denmark
p: +45 72 160 300
andritz-fb.dk@andritz.com

AUSTRALIA

p: +61 3 8773 4888
andritz-fb.au@andritz.com

CHINA

p: +86 21 5774 5781
andritz-fb.cn@andritz.com

ITALY

p: +39 (0445) 575 695
andritz-fb.it@andritz.com

TURKEY

p: +90 232 570 38 00
andritz-fb.tr@andritz.com

BANGLADESH

p: +880 22 2226 4800
andritz-fb.bd@andritz.com

DUBAI

p: +971 4 299 5555
andritz-fb.uae@andritz.com

MEXICO

p: +52 443 323 1530 ext 364
andritz-fb.mx@andritz.com

UK

p: +44 1482 825119
andritz-fb.uk@andritz.com

BRAZIL

p: +55 47 3387 9146
andritz-fb.br@andritz.com

FRANCE

p: +33 24 75 06 364
andritz-fb.fr@andritz.com

NETHERLANDS

p: +31 40 2627777
andritz-fb.nl@andritz.com

USA

p: +1 570 546 1253
andritz-fb.us@andritz.com

CANADA

p: +1 519 676 7057
anbosales@andritz.com

GERMANY

p: +49 2104 9197 0
andritz-fb.de@andritz.com

POLAND

p: +48 60 906 1037
andritz-fb.pl@andritz.com

VIETNAM

p: +84 8 6253 9434
andritz-fb.vi@andritz.com

CHILE

p: +56 2 24624608
andritz-fb.cl@andritz.com

INDIA

p: +91 87544 15287
andritz-fb.india@andritz.com

SOUTH AFRICA

p: +27 82 781 0808
andritz-fb.za@andritz.com

[ANDRITZ.COM/FT](https://www.andritz.com/ft)

JOIN US ON SOCIAL MEDIA



All data, information, statements, photographs and graphic illustrations in this leaflet are without any obligation and raise no liabilities to or form part of any sales contracts of ANDRITZ AG or any affiliates for equipment and/or systems referred to herein. © ANDRITZ AG 2021. All rights reserved. No part of this copyrighted work may be reproduced, modified or distributed in any form or by any means, or stored in any database or retrieval system, without the prior written permission of ANDRITZ AG or its affiliates. Due to legal requirements, we must inform you that ANDRITZ AG processes your data for the purposes informing you about the ANDRITZ GROUP and its activities. Find out more details about our data privacy declaration and your rights under the data protection legislation on our website: [andritz.com/privacy](https://www.andritz.com/privacy). ANDRITZ AG, Stattegger Strasse 18, 8045 Graz, Austria.



1261 GB